





## PHX2-5K-10-B -Altman Phoenix LED Profil 250W- 10°,5600K



### TEKNISKE DATA

Spenning	: inn 100-240VAC 50/60Hz (Selv)
LED (Intergreert):	250W
Fargetemperatur:	5600K
Ra indeks	: 92
Lysspredning	: 10 grader linse
Mac Adam	: 2 SDCM
Levetid	: 50 000 timer - L70
IP Grad	: IP20
VEKT	: 12 kg

### ILLUSTRASJONER:

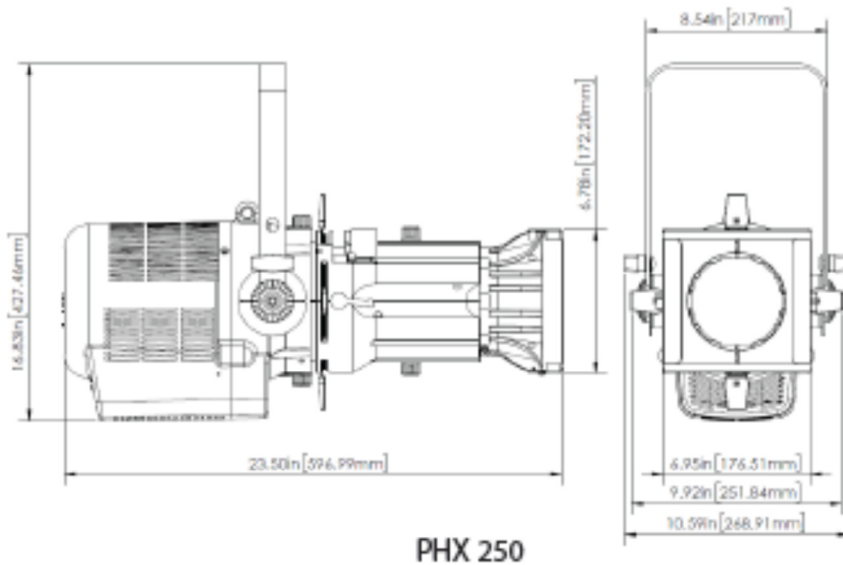

### LYS MÅLINGSVÆRDIER-5600K

#### 10 Degree

Throw Distance (d)	20' 6m	30' 9m	40' 12.2m	50' 15.2m	60' 18.28m	70' 21.33m	80' 24.38m	90' 27.43m	100' 30.48m	110' 33.52m
Beam Size Diameter	3.00' 0.91m	4.50' 1.37m	6.00' 1.82m	7.50' 2.286m	9.00' 2.74m	10.50' 3.20m	12.00' 3.65m	13.50' 4.11m	15.00' 4.57m	16.50' 5.02m
Illuminance = fc (Illuminance = lux)	1164.25 (12531.87)	517.44 (5569.72)	291.06 (3132.96)	186.28 (2005.09)	129.36 (1392.43)	95.04 (1023.01)	72.77 (783.24)	57.49 (618.85)	46.57 (501.27)	38.49 (414.27)

#### CP – Norway as

Org nr. 966674970  
Tel +47 55 20 97 00  
Fax +47 55 20 97 01

#### Bergen

Fabrikkgaten 3  
5059 Bergen  
mail:salg@cp-norway.no

#### Oslo –Prosjektkontor-Showrom

Hovfaret 4b  
0275 Oslo  
www.cp-norway.no