



- ☐ 17.0m max. working height
- ☐ 9.1m max. outreach
- ☐ Two person, 200kg capacity platform
- ☐ Articulating / telescopic boom with 1.3m, 140° jib
- ☐ 90° powered platform rotation
- ☐ Hydraulic outriggers
- ☐ Rugged, heavy duty construction

TL49K



TL49K trailer mount specifications

TL49K TRAILER MOUNT

max. working height	17.0m
max. platform height	15.0m
max. outreach	9.1m
platform capacity (SWL)	200kg
outrigger footprint	4.65m(A) x 4.65m(B)
turret rotation (non-continuous)	680°
platform rotation	90°
platform depth C	0.80m
platform width D	1.20m
stowed height E	2.10m
towing length F	7.10m
towing width G	1.75m
weight (battery model)	2250kg*
control system	fully proportional hydraulic controls at ground and basket
power source	24V battery (4 x 6V 195ah batteries) or 230V mains
power options	bi-energy (diesel and DC battery power)

* Machine towing weight depends on power configuration and supply of optional extras.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

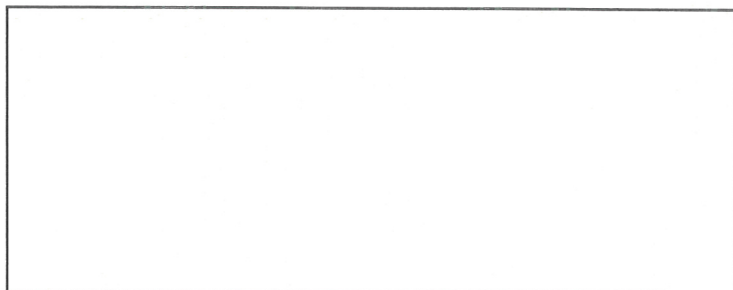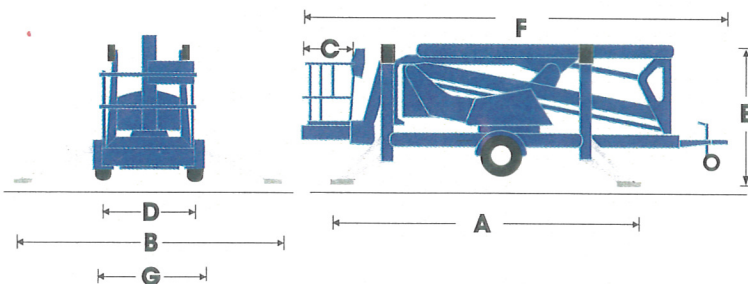

BP1 TL49K 10/06

UpRight
POWERED ACCESS

Tanfield Centre, Birtley Road, Washington,
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058

www.upright.com


standard features

- 1.3m jib with 140° working arc
- In-line boom design for maximum rigidity
- 90° hydraulically powered platform rotation
- Hand pump emergency lowering from platform
- Lock valves on all hydraulic cylinders
- Proportional live hydraulic controls
- 24V battery (4 x 6V 195ah batteries) or 230V mains power
- Automatic reversing and overrun braking
- Integral road lighting board
- 1 year parts and labour warranty
- 5 year structural warranty

options

- Hydraulic friction drive assist system
- On-board 230V generator for mains powered units
- Bi-Energy (diesel and DC battery) power
- GRP platform
- Special paint colours

Other options available on request

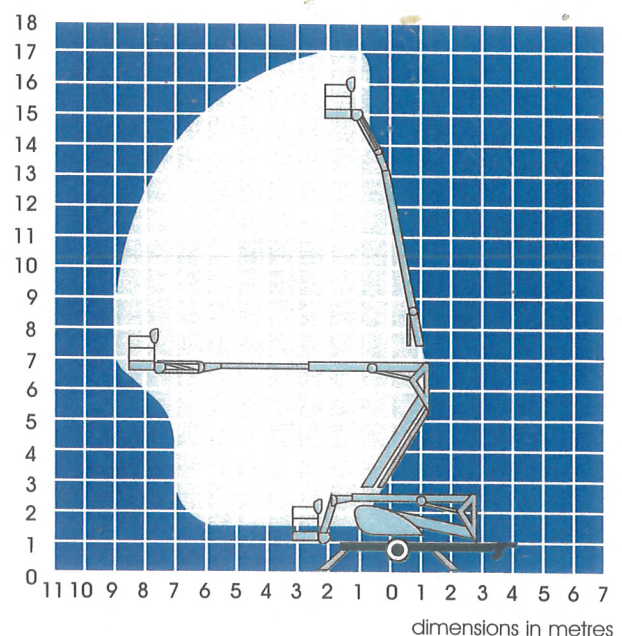

dimensions in metres



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS